

Radial Clearance Reduction



Measurements for SAF-style units

Nominal bore (in)		Basic bearing description*	Reduction in radial clearance (in)		Radial clearance prior to mounting (in)	
From	To		Min	Max	Min	Max
1-7/16	-	22209K	.0010	.0012	.0024	.0031
1-11/16	-	22210K	.0010	.0012	.0024	.0031
1-15/16	-	22211K	.0012	.0015	.0030	.0037
2-3/16	-	22213K	.0012	.0015	.0030	.0037
2-7/16	2-1/2	22215K	.0016	.0020	.0037	.0047
2-11/16	2-3/4	22216K	.0016	.0020	.0037	.0047
2-15/16	3	22217K	.0018	.0025	.0043	.0055
3-3/16	-	22218K	.0018	.0025	.0043	.0055
3-7/16	3-1/2	22220K	.0018	.0025	.0043	.0055
3-15/16	4	22222K	.0020	.0028	.0053	.0067
4-3/16	-	22224K	.0020	.0028	.0053	.0067
4-7/16	4-1/2	22226K	.0025	.0035	.0063	.0079
4-15/16	5	22228K	.0025	.0035	.0063	.0079
5-3/16	-	22230K	.0030	.0040	.0071	.0091
5-7/16	5-1/2	22232K	.0030	.0040	.0071	.0091
5-15/16	6	22234K	.0030	.0045	.0079	.0102
6-7/16	6-1/2	22236K	.0030	.0045	.0079	.0102
6-15/16	7	22238K	.0035	.0050	.0087	.0114
7-1/2	8	22244K	.0040	.0055	.0098	.0126
8-7/16	9	23048K**	.0045	.0060	.0079	.0106
9-7/16	9-1/2	23052K**	.0045	.0065	.0087	.0118
9-15/16	10-1/2	23056K**	.0045	.0065	.0087	.0118
10-15/16	11	23060K**	.0050	.0075	.0094	.0130
11-7/16	12	23064K**	.0060	.0085	.0106	.0142
12-7/16	12-1/2	23068K**	.0060	.0085	.0106	.0142
12-15/16	13-1/2	23072K**	.0065	.0090	.0118	.0157
13-15/16	14	23076K**	.0065	.0090	.0118	.0157
15	-	23080K**	.0065	.0090	.0118	.0157
15-3/4	-	23084K**	.0080	.0105	.0130	.0173


*222-series bearings are supplied standard with clearance C3

**230-series bearings are supplied standard with clearance C0



Like the convenience of this chart?

**What about the convenience of
4x faster installation with no
manual calculations?**

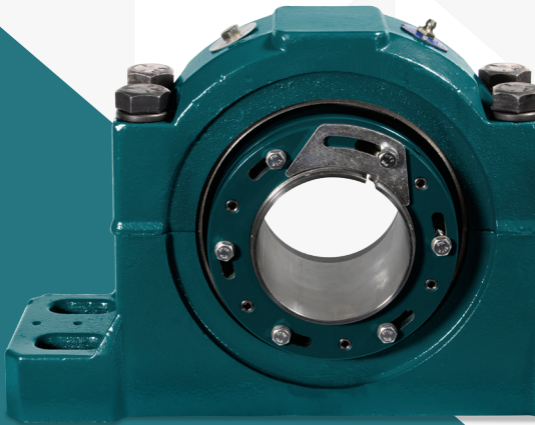

**Learn more about Safety Mount™ at
info.dodgeindustrial.com/safety-mount**

